


Crusher Track GCS 125



Rev Machine

+39 0541 928 474 
info@rev.it 
www.rev.it 

Heavy-duty mobile crushing unit with jaw crusher offering great production performance, suitable for large quarries and demolitions applications. Continuous and homogeneous feeding is provided by the apron feeder and the vibrating scalper, combined with sturdy deck grid bars and a screen with special anti-clogging elements for perfect pre-screening. As an alternative, the vibrating Grizzly feeder.

The hydrostatic transmissions are provided by Load Sensing pumps. The feeding system entails the use of ultrasound sensors integrated with parameters of the Diesel engine, thus allowing optimized production and lower fuel consumption.

| | |
|---|----------|
| Inlet dimensions (mm) | 1250x920 |
| CSS adjustment (mm) | 50-200 |
| Feeding hopper | |
| Standard capacity (m3) | 14 |
| Feed height (m) | 4900 |
| Apron feeder | |
| Width (mm) | 1150 |
| Length (mm) | 3900 |
| Vibration chute with pre-screening | |
| Width (mm) | 1250 |
| Length (mm) | 2300 |
| Decks | 2 |
| Main conveyor | |
| Width (mm) | 1200 |
| Discharge height (mm) | 3300 |
| Reversible conveyor | |
| Width (mm) | 1000 |
| Length (mm) | 1800 |
| Side discharge conveyor | |
| Width (mm) | 650 |
| Discharge height (mm) | 3000 |
| Engine | |
| Power (kW) | 261 |
| Crawler tread width (mm) | |
| Wheel base (mm) | 4400 |
| Weight (kg) | 68000 |
| Performance | |
| Max feeding size (mm) | 850 |
| Hourly production ton/h | 150-450 |


Optional:

- ✓ Lateral conveyor
- ✓ Magnetic Overband
- ✓ Magnetic Overband
- ✓ Reverse crush
- ✓ Automatic greasing unit



Transport dimensions

| | |
|-------------|-------|
| Length (mm) | 14640 |
| Width (mm) | 3000 |
| Height (mm) | 4200 |
| Weight (kg) | 28000 |

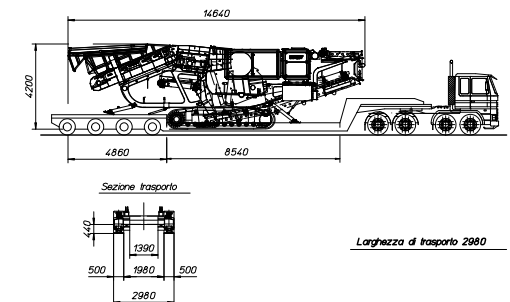

Rev Machine

+39 0541 928 474 
 info@rev.it 
 www.rev.it 