



Impact Crusher GCR 13.10



Rev Machine

+39 0541 928 474 
info@rev.it 
www.rev.it 

Flexible and manoeuvrable tracked self-propelled unit for large demolition, excavation and quarry front work. Crusher with heavy-duty bolted joints and 1650 mm deep crushing chamber. Automatic hydraulic registration and jaw opening control system.

The fully hydraulic machine is equipped with load-sensing pumps and a latest-generation electronic turbocharged motor latest generation. A machine with immediate controls, extreme ease of use and maintenance.

Inlet dimensions (mm)	1300x1040
CSS adjustment (mm)	30-200
Crusher weight (kg)	15000
Feeding hopper	
Standard capacity (m3)	7
Feed height (m)	4050
Vibrating feeder	
Width (mm)	1140
Length (mm)	3300
Vibrating screen	
Width (mm)	1240
Length (mm)	1800
Decks	2
Main conveyor	
Width (mm)	1200
Discharge height (mm)	3450
Reversible conveyor	
Width (mm)	1000
Length (mm)	2000
Side discharge conveyor	
Width (mm)	650
Discharge height (mm)	7000
Engine	
Power (kW)	370
Performance	
Max feeding size (mm)	800
Hourly production ton/h	up to 400
Working dimensions	
Length (mm)	15800
Width (mm)	7300
Height (mm)	4050


Optional:

- ✓ Lateral conveyors
- ✓ Magnetic Overband
- ✓ Automatic greasing unit
- ✓ Dust suppression system
- ✓ Diesel fueling pump



Transport dimensions

Length (mm)	16035
Width (mm)	3000
Height (mm)	3700
Weight (kg)	55600

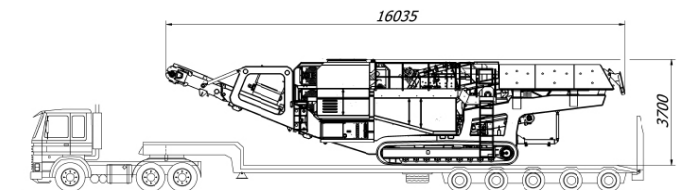

larghezza di trasporto 3000



Rev Machine

+39 0541 928 474 
 info@rev.it 
 www.rev.it 