




## Impact Crusher GCV 75.65



Rev Machine

+39 0541 928 474 

info@rev.it 

www.rev.it 

The GCV75.65 mobile impact crusher has been specially developed for use in tight spaces, such as inner-city projects. Its compact dimensions make it easy to transport from one construction site to another, striking a perfect balance between size and performance. The Rev track-mounted mobile impact crusher operates on a fully hydraulic concept, allowing flexible recycling of asphalt, concrete, and demolition debris. In addition to these materials, the GCV75.65 is also well-suited for precise processing of natural stone.

Inlet dimensions (mm)	750 x 650
Blow bars	4
CSS adjustment (mm)	20-110
Feeding hopper	
Standard capacity (m3)	3,2
Feed hight (m)	3100
Vibrating feeder Grizzly	
Width (mm)	900
Length (mm)	3350
Main conveyor	
Width (mm)	800
Discharge height (mm)	3000
Side discharge conveyor	
Width (mm)	400
Discharge height (mm)	2200
Engine	Volvo
Power (kW)	160 KW
Track	400
Wheel base (mm)	2900
Performance	
Max feeding size (mm)	500
Hourly production ton/h	150 Ton/h
Working dimensions	
Length (mm)	11500
Width (mm)	4050
Height (mm)	3100


Optional:

- √ Side conveyor
- √ Magnetic separator
- √ Dust Suppression System



Transport dimensions

Length (mm)	9000
Width (mm)	2410
Height (mm)	3100
Weight (kg)	19900

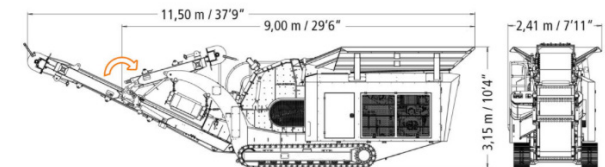

Rev Machine

+39 0541 928 474   
 info@rev.it   
 www.rev.it 